


# KLETON

## SNAP HOOK CHARACTERISTICS

- Multi-purpose connector
- Spring-loaded gate allows easy opening and closing
- Working load limit (WLL) stamped on each piece
- Not approved for climbing applications
- Manufacturer's Warranty: 1 Year Limited

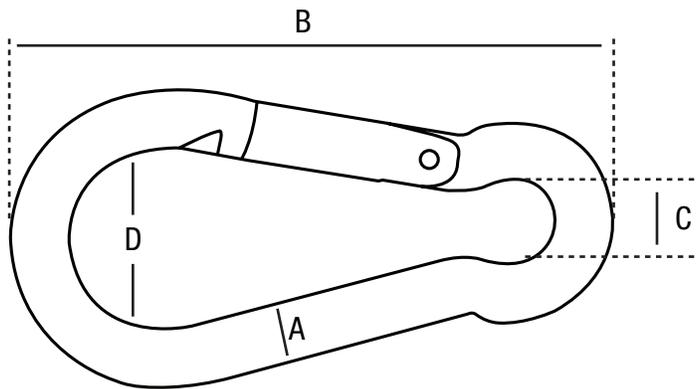

LW272

### Imperial (in)

Model No.	Material	Size Diameter (A)	Overall Length (B)	Eye Internal Diameter (C)	Hook Internal Diameter (D)	Working Load Limit (lbs)	Product Weight (lbs.)
LW272	Stainless Steel	3/16"	2"	5/16"	5/8"	220	0.033
LW273	Zinc Plated	3/16"	2"	5/16"	5/8"	220	0.032
LW274	Stainless Steel	1/4"	2-3/8"	3/8"	3/4"	260	0.055
LW275	Zinc Plated	5/16"	3-1/8"	1/2"	15/16"	500	0.132
LW276	Stainless Steel	5/16"	3-1/8"	1/2"	15/16"	500	0.137
LW277	Stainless Steel	3/8"	3-15/16"	5/8"	1-3/16"	770	0.267

### Metric (mm)

Model No.	Material	Size Diameter (A)	Overall Length (B)	Eye Internal Diameter (C)	Hook Internal Diameter (D)	Working Load Limit (kg)	Product Weight (g)
LW272	Stainless Steel	4.6	50	8.5	16	100	14.8
LW273	Zinc Plated	4.8	49.3	8.5	15	100	14.5
LW274	Stainless Steel	6.4	60	9.7	19	118	25
LW275	Zinc Plated	7.9	79.8	12.3	23.7	227	60
LW276	Stainless Steel	7.9	79.4	12.7	24.5	227	62
LW277	Stainless Steel	9.5	99.6	15.5	30	349	121.2

KLETON®

22555 Aut. Transcanadienne, Senneville, Quebec H9X 5X5

Phone: (866) 457-1163 Fax: (866) 457-1164

www.kleton.com info@kleton.com